


349.00 EUR

incl. 19% VAT, plus [shipping](#)

- Intel Elkhart Lake !
- 2x HDMI !
- 2x LAN !
- 3.5" Formfactor !

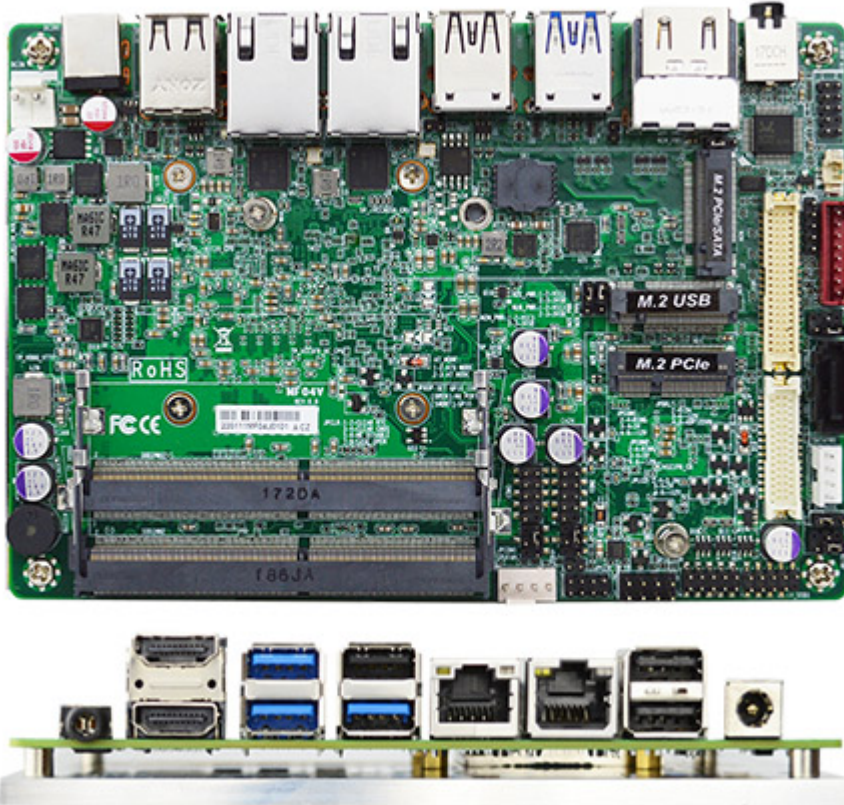

The JETWAY MF04V0X Series is 3.5" form factor board adopts the Intel® Elkhart Lake J6412 SoC Processor. The board supports two SO-DIMM DDR4 3200MHz Dual Channel memory, up to 32GB. Featuring the integrated Intel® 2.5 Gigabit Ethernet controller, the MF04V0X Series offers two 10/100/1000/2500Base-TX Ethernet device for network transmission. One SATAIII (6Gb/s) interface, one M.2 M-key and 32GB onboard eMMC (default) offer storage devices. Three USB3.1 Gen.2 ports, Five USB2.0 ports and two COM ports provide versatile expansion. The M.2 B-key 3042 can support 3G/4G/LTE card. The MF04V0X Series offers two HDMI2.0b ports and one LVDS (co-layout eDP). Because of the above features, MF04V0X Series is suitable for Panel PC, IOT Solution, Edge computing applications.

- Intel® Elkhart Lake SoC Processor
- 2\* DDR4 3200MHz Dual Channel SO-DIMM up to 32GB
- 2\* Intel i225V 2.5GbE
- 2\* HDMI2.0b, 1\* eDP (co-layout LVDS)
- 2\* COM, 3\* USB3.1 (Gen.2), 5\* USB2.0
- 1\* M.2 E-key 2230, 1\* M.2 B-key 3042 W/SIM card slot
- 1\* M.2 M-key 2242/2280, 1\* SATAIII (6Gb/s); 32GB eMMC (default)
- Support 12~24V DC-in

|                  |                                                                                                                                                                                                                                |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model            | <ul style="list-style-type: none"> <li>– MF04V00 (J6412 CPU_10W)</li> <li>– MF04V02 (J6412 CPU_10W, W/TPM2.0)</li> <li>– MF04V03 (J6412 CPU_10W, 32GB eMMC)</li> <li>– MF04V07 (J6412 CPU_10W, 32GB eMMC, W/TPM2.0)</li> </ul> |
| Form Factor      | – 3.5" (5.8-in * 4.0-in, 148 * 102mm)                                                                                                                                                                                          |
| Processor System | <ul style="list-style-type: none"> <li>– Intel® Elkhart Lake J6412 SoC Processor (TDP 10W)</li> <li>– AMI Flash ROM BIOS</li> </ul>                                                                                            |

|                |                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Expansion Slot | <ul style="list-style-type: none"> <li>– 1* M.2 B-key (3042) Support USB3.1/USB2.0 interface W/SIM card slot</li> <li>– 1* M.2 E-key (2230) Support USB2.0/PCIe Gen.3 x1 interface</li> </ul>                                                                                                                                                                                                       |
| Memory         | <ul style="list-style-type: none"> <li>– 2* SO-DIMM DDR4 3200MHz Dual Channel SDRAM up to 32GB</li> </ul>                                                                                                                                                                                                                                                                                           |
| Graphics       | <ul style="list-style-type: none"> <li>– Intel® HD Graphics, shared memory</li> <li>– 1* eDP (Max Resolution: 4096×2160@60Hz)</li> <li>– 1* LVDS (Max Resolution: 1920×1080@60Hz)</li> <li>– 2* HDMI2.0b (Max Resolution: 4096×2160@60Hz)</li> </ul>                                                                                                                                                |
| Ethernet       | <ul style="list-style-type: none"> <li>– 2* Intel® i225V 2.5GbE</li> </ul>                                                                                                                                                                                                                                                                                                                          |
| Audio          | <ul style="list-style-type: none"> <li>– 2 channel HD audio: Realtek® ALC888S</li> </ul>                                                                                                                                                                                                                                                                                                            |
| Storage        | <ul style="list-style-type: none"> <li>– 1* SATAIII</li> <li>– 32GB onboard eMMC (MF04V03 &amp; MF04V07)</li> <li>– 1* M.2 M-key (2242/2280) PCIe Gen.3 x2/SATA interface Support NVME</li> </ul>                                                                                                                                                                                                   |
| Rear I/O       | <ul style="list-style-type: none"> <li>– 3* USB3.1 (Gen.2), 3* USB2.0</li> <li>– 2* HDMI</li> <li>– 2* RJ45</li> <li>– Line-out/MIC combo jack</li> <li>– DC-in (12~24V)</li> </ul>                                                                                                                                                                                                                 |
| Internal I/O   | <ul style="list-style-type: none"> <li>– 2* USB2.0</li> <li>– 1* eDP (co-layout LVDS)</li> <li>– 1* LVDS w/ Inverter</li> <li>– 1* RS232, 1* RS232/422/485</li> <li>– 1* SATAIII</li> <li>– 1* SIM card slot (along with M.2 B-key)</li> <li>– 1* GPIO (8 bit)</li> <li>– 1* Audio Header</li> <li>– 1* SMBUS</li> <li>– 1* CPU FAN</li> <li>– 1* TPM2.0 onboard (MF04V02 &amp; MF04V07)</li> </ul> |
| Watchdog Timer | <ul style="list-style-type: none"> <li>– From Super I/O to drag RESETCON#</li> <li>– 256 segments (10sec ~ 255min)</li> </ul>                                                                                                                                                                                                                                                                       |
| Power          | <p>DC-IN 12~24V, AT/ATX Supported</p> <ul style="list-style-type: none"> <li>– AT: Directly PWR on as Power input ready</li> <li>– ATX: Press Button to PWR on after Power input ready</li> </ul>                                                                                                                                                                                                   |
| Compliance     | <ul style="list-style-type: none"> <li>– CE, FCC, LVD, RoHS, REACH</li> </ul>                                                                                                                                                                                                                                                                                                                       |
| Temperature    | <ul style="list-style-type: none"> <li>– Operating: 0°C ~ 60°C</li> <li>– Storage: -20°C ~ 85°C</li> <li>– Humidity: 10% ~ 90% RH @40°C (non-condensing)</li> </ul>                                                                                                                                                                                                                                 |
| OS Support     | <ul style="list-style-type: none"> <li>– Windows 10, Windows 11, Linux</li> </ul>                                                                                                                                                                                                                                                                                                                   |